


PRODUCT MANUAL

Product: Mixing room#YFT-700

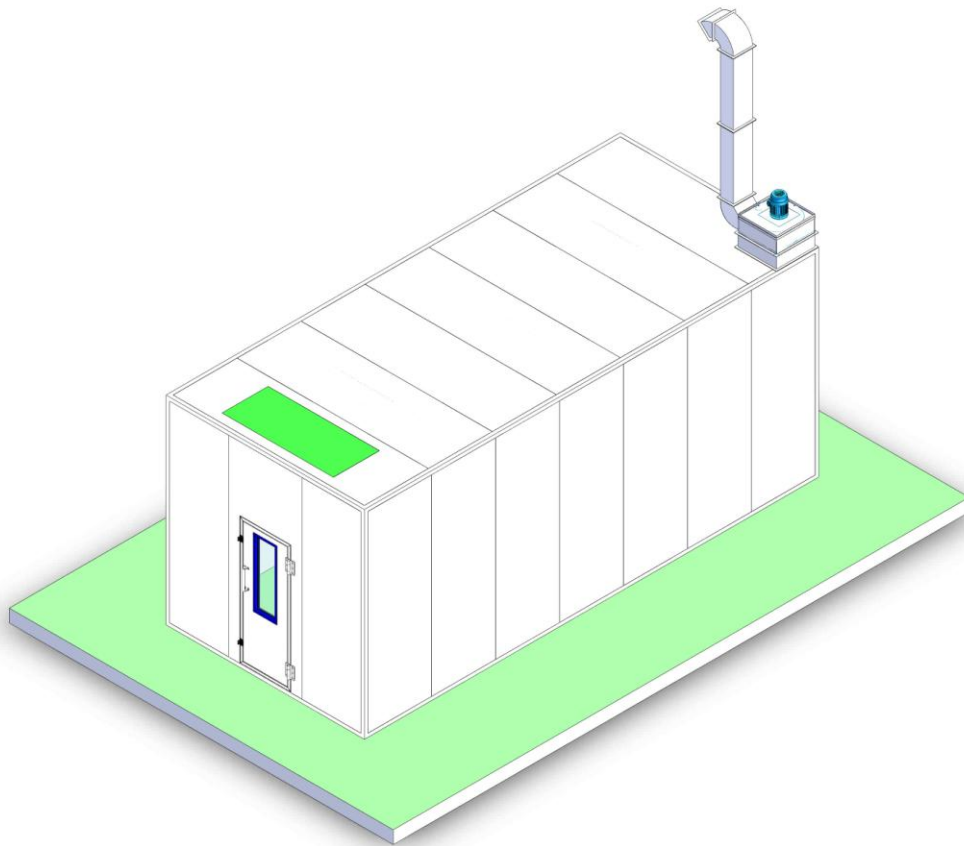

Address: No.2, TaiGang Road, BaiYun District, Guangzhou, Guangdong, China

Tel: 86 - 20 - 36051789

Fax: 86 - 20 - 36051797

Email: fengyin@gz-infitech.com

Website: www.yft-spraybooth.com

QUOTATION





1) PRODUCT AND PRICE

Currency: USD

NO.	Name	Model	Unit	QTY	Unit price	Total price
1	Mixing room	YFT-700	set	1	1,675	1,675
Total EXW price						1,675

2) PRICE TERMS

- Quotation is valid for 60 days.
- Terms of payment: T/T 100% in advance upon order confirmation.
- Production lead time: 25 days after signing the contract.
- Price includes 2-year warranty and service, but excluding the fare.
- Loading situation: LCL shipment.

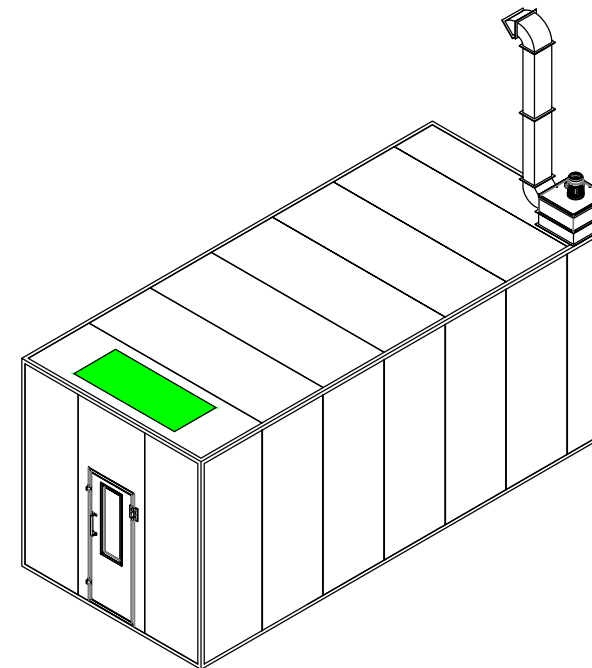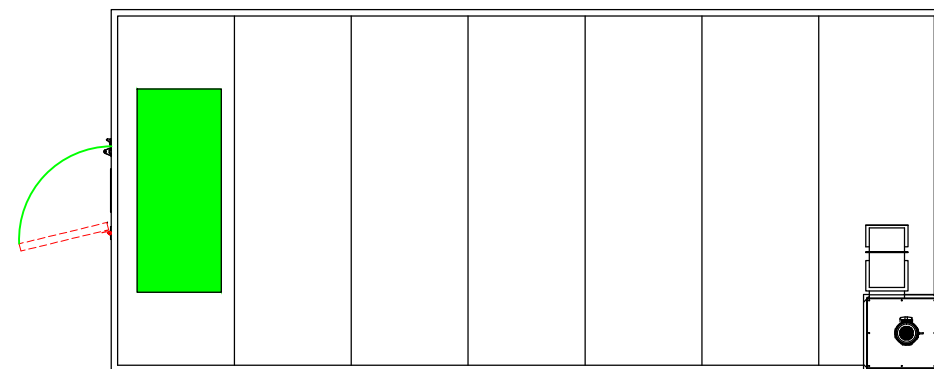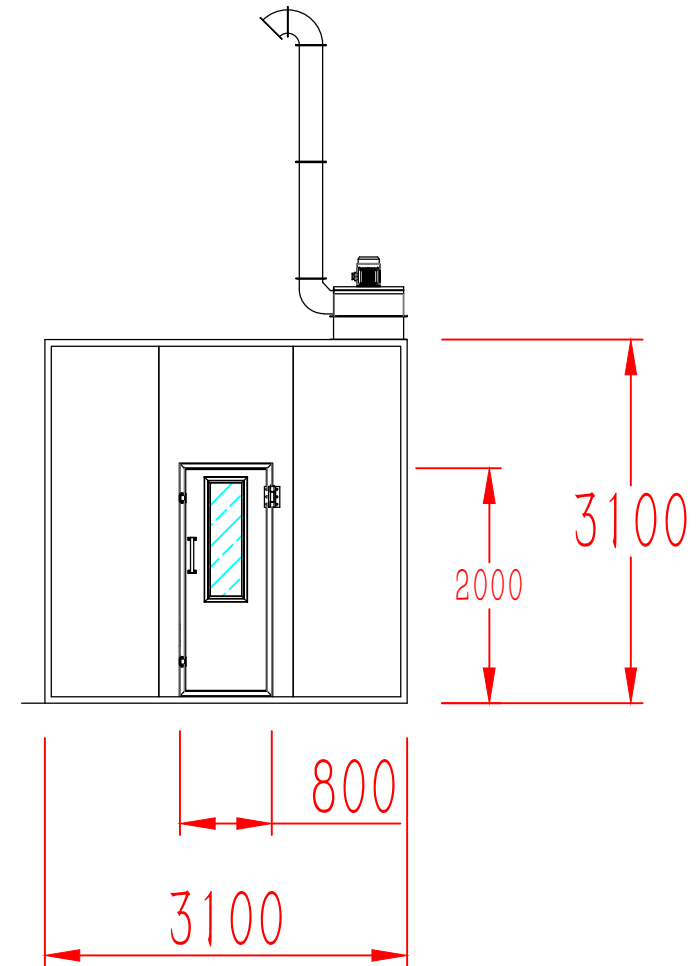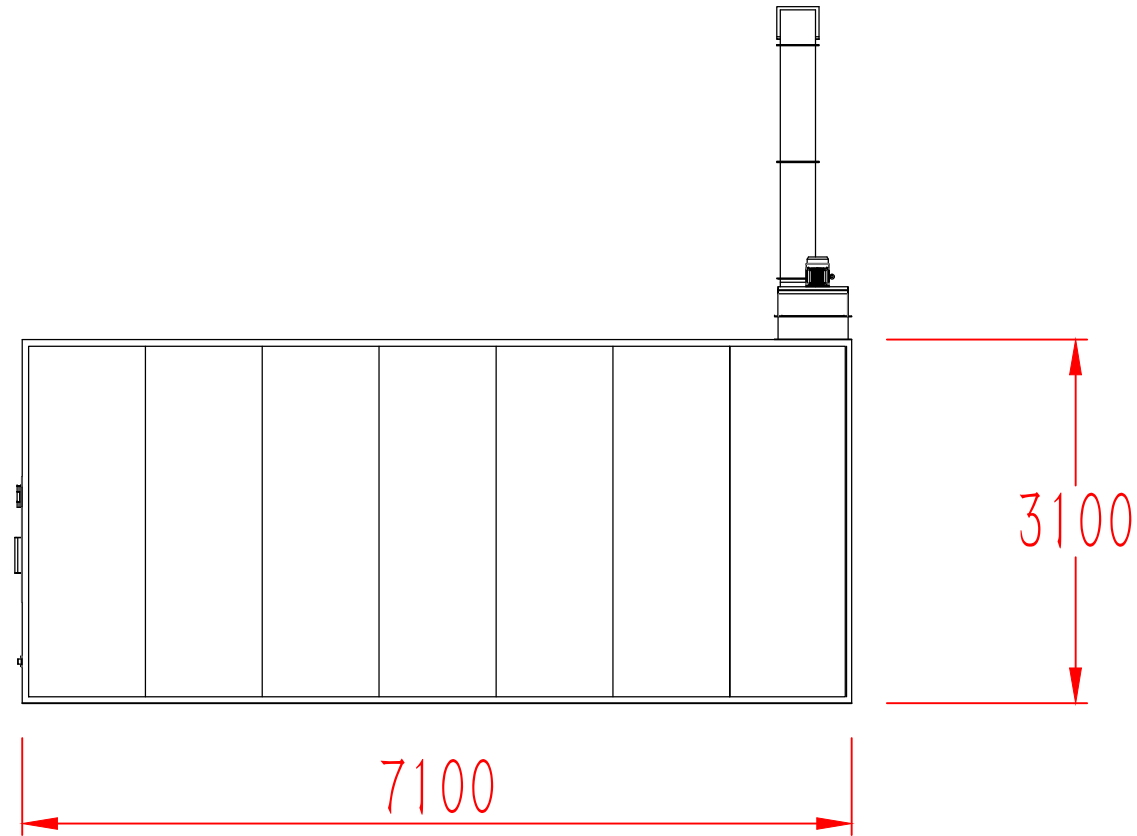

INFITECH [®]				Mixing Room YTT-700				Product Model		
								Part No.		
Designed		Date:		Material	Quantity	Weight	Scale	Unit	mm	
Drawn		Date:					1:1	Revision No.		
Checked		Date:		View		Total Page	,Page	Description		
Approved		Date:								

Product: YFT-700
Basic information

DESIGN STANDARD	BS EN 13355: 2004 + A1: 2009 BS EN 60204: 2006 + A1: 2009
BOOTH DIMENSIONS	
Internal dimensions	7000 X 3000 X 3000mm (L X WX H)
External dimensions	7100 X 3100 X 3050mm (L X W X H)
WALL PANEL	
Wall panel	50mm wall panel, wallboard filler material: heat-resistant rock wool panel
Top material	50mm wall panel, wallboard filler material: heat-resistant rock wool panel
ENTRANCE DOOR	
Form	Manual door
Size	800 x 2000 (W X H)
Quantity	1 set
Door description	Containing frame, filled with heat-resistant rock wool, with safety glass observation window
CEILING LIGHTING	(LED lamp)
QTY and power	5 sets of light fixtures, each 4 X 18W, 360W total
Lighting arrangement	At the ceiling
Lighting description	Protection grade IP55
Brightness	> 800Lux
FILTRATION SYSTEM	
Pre-filter	Fiberglass filter cotton
Ceiling filter	N/A
Bottom paint mist collection	N/A
Exhaust filter	N/A
EXHAUST SYSTEM	
Exhaust fan	Direct-type turbine fan
Power and motor description	1 X 1.5KW, 1470rpm, 400V, 50 Hz, CE
Parameter of exhaust fan	5,000m ³ /h, 500pa
PIPELINE CONFIGURATION	
Straight ducting	3 pieces
90°	1 piece
Reducer	1 piece
CONTROL SYSTEM	
Implementation standards	Start directly
Features	Fan start, emergency stop switch, failure indication
SPECIAL ITEM	

Service commitment

Before you buy

Product quality commitment:

1. Product manufacturing and testing have quality record and testing files.
2. Product performance test. Customers will be invited to attend the complete test procedure. Once product is qualified, we will proceed with package and delivery then.

Product price commitment:

1. Use well-known raw materials to ensure high reliability and advancement of product.
2. Under the equal race condition, our company offers the most favorable price, but won't be at the cost of reducing product performance and changing product components.

Are buying

Delivery time commitment:

Product delivery time: comply with customer's requirement. If the goods need to be finished in advance, we will arrange production and erection to satisfy the customers.

After purchase

After purchase service commitment:

1. Service purpose: fast, decisive, exact and considerable.
2. Service target: service quality to win customer satisfaction.
3. Service principle: the warranty is 24 months, the supplier freely replaces damaged parts caused by quality reason within warranty. Beyond the warranty, the supplier provides spare parts at cost. If the equipment damages are caused by human factors, the supplier repairs or provides spare parts at cost. Our technicians will provide technical support in 24 hours upon receiving your report of the problems.

Engineering cases

Hitachi elevator (Guangzhou) escalator Co., Ltd.



Jilin high tech Electric Vehicle Co., Ltd.



Hitachi elevator (Guangzhou) escalator Co., Ltd.



Pacoma (China) hydraulic equipment Co., Ltd.



Malaysia



Czech Republic



Manufacturing base

